


Treating fuel with Carbonex HFO while transferring

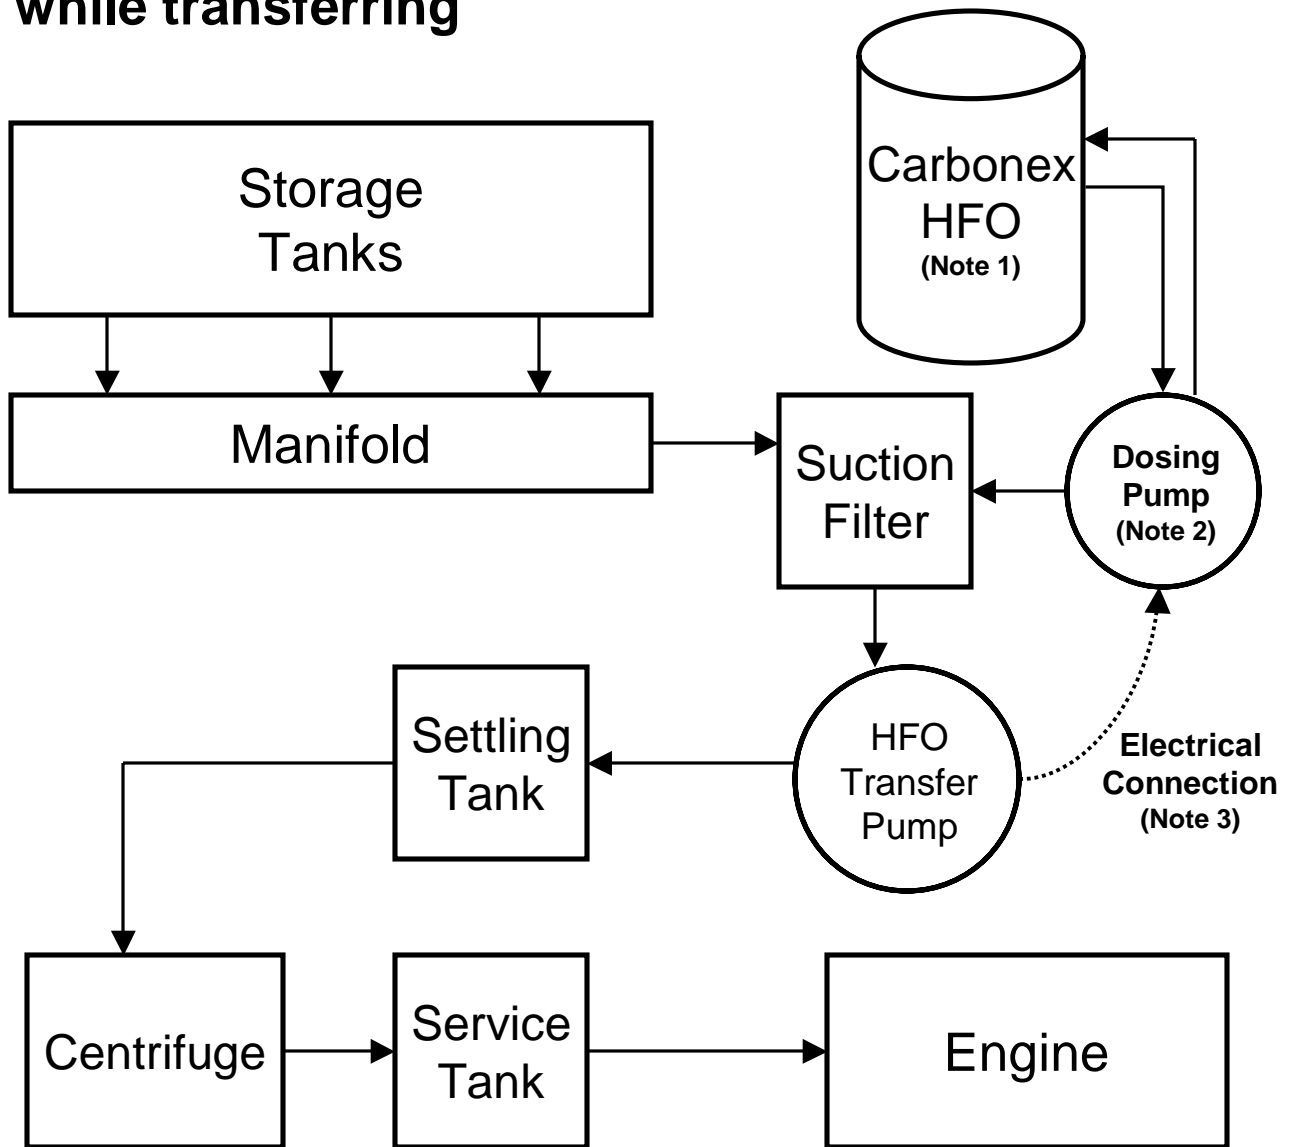

Notes:

- (1) Carbonex HFO can be pumped directly from its 205 liter drum or from a larger storage tank.
- (2) Chemical dosing pump with adjustable flow rate, powered by ship's electrical supply. Additive is metered into fuel stream at 1 liter per 5 tonnes fuel oil. High pressure hose to suction filter, separate feed and return lines between dosing pump and Carbonex HFO tank.
- (3) Transfer pump can electrically trigger the dosing pump to automate the fuel treatment and ensure accurate and consistent dosing with Carbonex HFO.